

HAZET – Range of Pneumatic Tools

Extensive range of pneumatic tools:

- ✓ Impact Wrenches 10 3/8 12 1/2 20 3/4 25 1"
- ✓ Air Ratchets 6.3 1/4 10 3/8 12 1/2 6.3 1/4
- ✓ Drill, Angle Drill
- ✓ Die Grinders, straight and angled
- ✓ Chisel Hammer Set
- ✓ Orbital Sander, Belt Sander, Angle Grinder
- ✓ Sabre Saw
- ✓ Needle Scaler
- ✓ Air Nibbler, Air Shear
- ✓ Air Blow Guns, Air Blow Pens and many more...



Impact Wrench

- **Ultra-light (1.2 kg) magnesium housing** lighter than comparable aluminium housings
- **Powerful pin clutch mechanism**
- 3 power settings in forward
- Best possible distribution of weight for ergonomic working
- Screw size: M 13
- Recommended torque: up to 190 Nm
- Max. loosening torque: 350 Nm
- Air consumption: 71 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 90 dB(A)
- Cold-insulated handle
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Forward and reverse
- Easy handling
- Coupler plug, nominal size 7.2 included

10 3/8"



HAZET No.	Nm max.	1/min	Δg g	EAN-No. 4000896+
9011 MG	250	10000	1200	109180



- **Ultra-light (2.6 kg) magnesium housing** lighter than comparable aluminium housings
- **Powerful twin hammer mechanism**
- 3 power settings in forward
- Screw size: M 16
- Recommended torque: up to 542 Nm
- Max. loosening torque: 1490 Nm
- Air consumption: 133 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 88 dB(A)
- Cold insulated handle
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Forward and reverse
- Easy handling
- Coupler plug, nominal size 7.2 included

12 1/2"



HAZET No.	Nm max.	1/min	Δg g	EAN-No. 4000896+
9012 MG	740	7500	2600	109197



- **Ultra-light (5.2 kg) magnesium housing** lighter than comparable aluminium housings
- **Powerful twin hammer mechanism**
- 3 power settings in forward
- Screw size: M 30
- Recommended torque: up to 1084 Nm
- Max. loosening torque: 1800 Nm
- Air consumption: 206 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 87 dB(A)

20 3/4"



Impact Wrench

- Cold insulated handle
- Exhaust air is guided through the handle downwards
- Reduced vibrations
- Forward and reverse
- Easy handling
- Coupler plug, nominal size 7.2 included



HAZET No.	Nm max.	1/min	Δg g	EAN-No. 4000896+
9013 MG	1490	5500	5200	109210



25 1"

- **Ultra-light (8.8 kg) magnesium housing** lighter than comparable aluminium housings
- **Powerful twin hammer mechanism**
- Multiple power settings in forward and reverse
- Screw size: M 32
- Recommended torque: up to 1355 Nm
- Max. loosening torque: 2600 Nm
- Air consumption: 300 l/min
- Air inlet thread: 1/2"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 111.4 dB(A)
- Cold insulated handle
- Exhaust air is guided downwards



HAZET No.	Nm max.	1/min	Δg g	EAN-No. 4000896+
9014 MG	2160	4500	8800	109227



25 1"

- **Ultra-light (9.9 kg) magnesium housing** lighter than comparable aluminium housings
- **Long drive spindle (190 mm) – for the operation of deeply located screws**
- **Powerful twin hammer mechanism**
- Multiple power settings in forward/reverse
- Screw size: M 32
- Recommended torque: up to 1355 Nm
- Max. loosening torque: 2600 Nm
- Air consumption: 300 l/min
- Air inlet thread: 1/2"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 111.4 dB(A)
- Cold-insulated handle
- Exhaust air is guided downwards

HAZET No.	Nm max.	1/min	Δg g	EAN-No. 4000896+
9014 MG-Lg	2160	4500	9900	115853

Impact Wrench



- Especially for wheel mounting
- For controlled screw tightening **without impact effect** at 50 Nm max.
- **Loosening** of screws at max. 700 Nm, with automatic impact mechanism
- Overload protection due to pressure limit at 6.3 bar
- Max. loosening torque: 1250 Nm
- Air consumption: 300 l/min
- Air inlet thread: 3/8"
- Working pressure: 6.3 bar
- Noise level: 85.1 dB(A)
- Cold-insulated handle
- Reduced vibrations
- Exhaust air is guided through the handle
- **12.5** drive 12.5 = 1/2", in conjunction with impact sockets, e.g. HAZET 900 S

HAZET No.	Nm max.	1/min	ΔT g	EAN-No. 4000896+
9012-50	50 / 700	7000	3000	083732



- **Maximum performance at minimum weight** (1.9 kg)
- Shock resistant plastic housing
- **Powerful twin hammer mechanism**
- Multiple power settings in forward and reverse
- Screw size: M 16
- Recommended torque: up to 515 Nm
- Max. loosening torque: 1490 Nm
- Air consumption: 133 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 98.5 dB(A)
- Cold-insulated handle, reduced vibrations
- Exhaust air is guided to the handle downwards
- Coupler plug, nominal size 7.2 included

HAZET No.	Nm max.	1/min	ΔT g	EAN-No. 4000896+
9012 KS	690	7700	1900	109203

Air Ratchet



- Forward and reverse
- Continuous regulation
- Air consumption: 180 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 83 dB(A)
- Cold insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included

HAZET No.	Nm max.	1/min	ΔT g	l mm	EAN-No. 4000896+
9020-2	35	170	500	165	109432



- Forward and reverse
- Continuous regulation
- Air consumption: 180 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 88 dB(A)
- Cold insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included

HAZET No.	Nm max.	1/min	ΔT g	l mm	EAN-No. 4000896+
9021-2	70	160	1200	230	109449



- **Short design**
- Forward and reverse
- Continuous regulation
- Air consumption: 180 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 83 dB(A)
- Cold insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included

HAZET No.	Nm max.	1/min	ΔT g	l mm	EAN-No. 4000896+
9021-3	35	170	500	165	116614

Air Ratchet for Bits



Low height for working areas with restricted access

- 6.3 mm bit holder suitable for standard screwdriver sockets (bits) with 6 mm hexagon (bits are not included in delivery)
- 10 mm ratchet
- Forward and reverse
- Max. torque 47 Nm
- Continuous regulation
- Air consumption 81 l/min
- Working pressure 6.3 bar
- Sound pressure level 88 dB(A)
- Total length 165 mm
- Cold insulated handle
- Reduced vibrations
- Weight 0.5 kg
- Coupler plug, nominal size 7.2 included

HAZET No.	Nm max.	1/min	Weight g	l mm	EAN-No. 4000896+
9021-4	47	200	500	165	143788

Air Ratchet



- Forward and reverse
- Continuous regulation
- Air consumption: 180 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 88 dB(A)
- Cold insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included

HAZET No.	Nm max.	1/min	Weight g	l mm	EAN-No. 4000896+
9022-2	70	160	1200	230	109456

Air Ratchet



- High torque values 110 Nm, no further ratcheting necessary
- Forward and reverse
- Continuous regulation
- Air consumption: 180 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 89 dB(A)
- Cold insulated handle
- Reduced vibrations
- Coupler plug, nominal size 7.2 included

HAZET No.	Nm max.	1/min	Weight g	l mm	EAN-No. 4000896+
9022-3	110	160	1400	270	140701

Air Drill



- Especially appropriate for car body works and industry
- Quick-change chuck, capacity 1 – 10 mm
- Forward and reverse
- Air consumption: 113 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level Lp A: 91 dB(A)
- Cold insulated handle
- Exhaust air is guided through the handle downwards
- Robust housing
- Suitable for continuous operation
- Coupler plug, nominal size 7.2 included

HAZET No.	1/min	Weight g	EAN-No. 4000896+
9030-1	2600	1350	109470

Angle Drill



For working in areas with difficult access

- Quick change chuck, capacity 1–10 mm
- Forward and reverse
- Exhaust air is guided through the handle backwards
- Air consumption: 113 l/min
- Working pressure: 6.3 bar
- Sound pressure level: 95 dB(A)
- Coupler plug, nominal size 7.2 included

HAZET No.	1/min	⚖ g	EAN-No. 4000896+
9030-5	1200	1100	132379

Angle Die Grinder



- For grinding, polishing, burnishing and deburring
- High ease of use
- Ergonomically shaped
- **Angled design**
- Speed regulation with setting wheel
- Power: 160 Watts
- Air consumption: 113 l/min
- Air inlet thread 1/4"
- Working pressure: 6.3 bar
- Sound pressure level: 90 dB(A)
- Collet chuck: 6 mm
- Coupler plug, nominal size 7.2 included

HAZET No.	1/min	⚖ g	l mm	EAN-No. 4000896+
9032-5	2000–22000	560	160	117062

Die Grinder, straight design



- For grinding, polishing, burnishing and deburring
- High ease of use
- Ergonomic design
- **Straight design**
- Speed regulation with setting wheel
- Power: 164 Watts
- Air consumption: 113 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level: 91 dB(A)
- Collet chuck: 6 mm
- Coupler plug, nominal size 7.2 included



HAZET No.	1/min	⚖ g	l mm	EAN-No. 4000896+
9032-1	2000–25000	380	158	117055

Orbital Sander



With dust collector

- Exhaust hose (1.8 m) and dust collector included
- Continuous speed regulation
- Low height and light composite housing facilitate easy and controlled working
- Stroke: 5 mm
- Grinding disc with 6 bore holes, Ø 150 mm, with hook and loop fastener
- Anti-slip handle
- Air consumption: 113 l/min
- Working pressure: 6.3 bar
- Noise pressure level: 72 dB(A)
- Coupler plug, nominal size 7.2 included

6 m spiral exhaust-hose, sanding discs and replacement pads see page 247

HAZET No.	⚖ g	1/min	EAN-No. 4000896+
9033-1	850	10000	132348

Belt Sander



For narrow surfaces (belt width 10 mm)

- 360° head rotation
- Continuous speed regulation
- Automatic belt adjustment
- Locking device for quick belt changing
- Three sanding belts included 330 x 10 mm (grain size 80, 100, 120)
- Belt speed: 1,188 m / min
- Air consumption: 240 l/min
- Working pressure: 6.3 bar
- Noise pressure level: 73 dB(A)
- Coupler plug, nominal size 7.2 included

Sanding belts see page 247

HAZET No.	⌀ _g	1/min	EAN-No. 4000896+
9033-4	800	18000	131815

Angle Grinder



Cut-off wheel 100 x 0.8 x 9.53 (3/8") mm included For working areas with restricted access,

suitable for cutting metal sheet and steel

- For cut-off wheels up to 100 x 1,0 x 10 mm
- Cold-insulated handle
- Air consumption 113 l/min
- Low height for working areas with restricted access
- Reduced vibrations
- Working pressure 6.2 bar
- Noise pressure level: 102.3 dB(A)
- Coupler plug, nominal size 7.2 included
- Quick adjustment (without tools) of protection cover with pressure key

Cut-off wheels see page 247

HAZET No.	⌀ _g	1/min	l / min	EAN-No. 4000896+
9033-8	1800	16000	400	143771

Angle Grinder



For grinding discs 125 x 22 mm

- Lateral handle, to be used on left or right side
- Spindle locking
- Quick adjustment (without tools) of protection cover
- For grinding discs up to a thickness of 0.8 - 6 mm
- Noise pressure level: 89 dB(A)
- Working pressure: 6.3 bar
- Air consumption: 113 l/min
- Air inlet thread 1/4"
- Spindle thread M14 x 2
- Coupler plug, nominal size 7.2 included

HAZET No.	⌀ _g	1/min	EAN-No. 4000896+
9033-7	1900	10000	132386

Sabre Saw



For one-hand operation

- Adjustable support frame, suitable for double-walled sheet steel
- Suitable for cutting small radii
- Cutting capacity: sheet steel 2.9 mm / aluminium 3.2 mm
- 3 saw blades included (total length: 70 mm)
- Free speed: 9,500 strokes/min
- Air consumption: 170 l/min
- Working pressure: 6.3 bar
- Joint protects the air hose from kinking
- Coupler plug, nominal size 7.2 included

Saw blades see page 247

HAZET No.	⌀ _g	l / min	EAN-No. 4000896+
9034-1	600	215	132362

Needle Scaler



Pistol shape

- 19 pcs. needles \varnothing 3 mm for efficient rust removing
- 3,200 impacts/ min
- Adjustable needle cover enables maximum utilisation of needles
- Two-piece housing design for easy maintenance
- Cold-insulated handle
- Air consumption: 170 l/min
- Noise pressure level: 97 dB(A)
- Working pressure: 6.3 bar
- Dimensions: 330 x 45 x 205 mm
- Coupler plug, nominal size 7.2 included

Spare needles see page 247

HAZET No.	\varnothing g	l mm	EAN-No. 4000896+
9035-5	2600	330	132355

Air Shear



Ideal for cutting small radii (min. 7 mm)

- Cutting capacity: steel 1.2 mm / aluminium 1.6 mm
- Also suitable for cutting plastic
- Continuous speed regulation
- Twin bearing spindle reducing vibrations
- Cold-insulated handle
- Air consumption: 85 l/min
- Working pressure: 6.3 bar
- Noise pressure level: 82 dB(A)
- Cutting width: 4.5 mm
- Total length: 190 mm
- Coupler plug, nominal size 7.2 included

HAZET No.	\varnothing g	l/min	l mm	EAN-No. 4000896+
9036-1	1200	2600	190	131822

Chisel Hammer Set



- For detaching car body sheets with compressed air and for industrial application
- Also suitable for loosening rusted screws
- 6 pieces, in plastic case
- 3000 impacts/min
- Chisel insert: \varnothing 10 mm
- Power control with push-button
- Air consumption: 240 l/min
- Air inlet thread: 1/4"
- Working pressure: 6.3 bar
- Sound pressure level: Lp A 98 dB(A)
- Cold insulated handle
- Set of 5 chisels (length: 175 mm each)
- Coupler plug, nominal size 7.2 included

HAZET No.	\varnothing g	l/min	EAN-No. 4000896+
9035/6	1700		109463

Air Nibbler




With heavy-duty cutting blade for maximum cutting performance: steel 1.2 mm / aluminium 1.6 mm

- Also appropriate for contour cuts
- Change of cutting speed with push-button
- Twin bearing spindle reducing vibrations
- Cold-insulated handle
- Air consumption: 113 l/min
- Working pressure: 6.3 bar
- Noise pressure level: 82 dB(A)
- Cutting width: 4.5 mm
- Coupler plug, nominal size 7.2 included

HAZET No.	\varnothing g	l/min	EAN-No. 4000896+
9036-5	1100	220	132331

Air Blow Gun

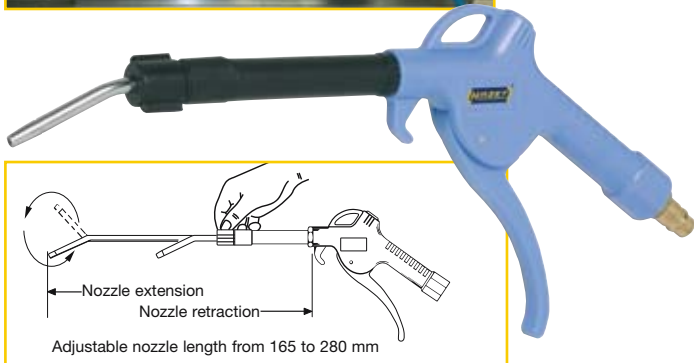

- For the fast removing and cleaning of chips and other kinds of foreign substances. To be used in workshops, wood working, decor, housework and on machinery, especially in areas with restricted access.
- With non-slip handle
- Body material: nylon, nozzle material: steel
- Maximum pressure: 220 PSI / 15 bar
- Working pressure: 75 up to 120 PSI, 5 up to 8 bar
- Max. air flow: 300 l/min
- Sound pressure level 85 up to 90 dB/A
- Air inlet thread 6.3 mm (1/4")
- Coupler plug, nominal size 7.2 included

HAZET No.	g	EAN-No. 4000896+
Standard execution nozzle length: 93 mm, total length: 205 mm		
9040-1	250	109487
Nozzle length continuously adjustable from 165 to 280 mm		
9040-2	250	109494

Pocket Blow Pen



- Practical and compact design with clip for fixation e.g. on pockets
- Turn to adjust air flow, air nozzle \varnothing 3 mm
- Easy handling, clicks directly on air coupling 7.2 mm
- Inlet pressure: 12 bar
- Max. airflow at 6 bar: 360 l/min
- High-quality Perbunan seal (NBR)
- Duraluminium housing
- Length: 109 mm
- Coupler plug, nominal size 7.2 included

HAZET No.	g	l mm	EAN-No. 4000896+
9040-3	160	109	109500

Mini Oiler



For oiling pneumatic tools automatically

- Compact design - to be fixed directly to the tool
- Air inlet thread 1/4" - suitable for nearly all air tools
- Extension of the service life of your pneumatic tools
- Refillable

HAZET No.	g	EAN-No. 4000896+
9070-1	99	129188

High Performance Cordless Impact Wrench



- 19.2 V 2 Ah NiMH rechargeable battery - Without memory effect - Two-sided fixation for a flexible use
- ■ drive 12.5 = 1/2"
- Drive square with O-ring locking
- Complete with quick charger (charging time 30 to 60 minutes)
- In plastic case
- Fast and cost-effective replacement of the carbon brushes
- Free speed: 0-2,500 1/min.
- Inverse button forward/reverse (in central position: locking of the operation trigger)
- Max. loosening torque 405 Nm
Max. torque 380 Nm
Recommended torque 360 Nm

HAZET No.	Nm max.	1/min	g	EAN-No. 4000896+
9212-1	380	0-2500	3300	120109

Replacement rechargeable battery

- 19.2 V / 2.0 Ah
- NiMH
- Without memory effect

9212-01	120673
---------	--------

Replacement carbon brushes (2 pcs. per set)

9212-02/2	120611
-----------	--------





***Good tools are a
matter of trust!***

HAZET[®]
www.hazet.com