

SCREWDRIVERS

SONIC SCREWDRIVERS ARE MADE OF EXPERT QUALITY CHROME VANADIUM AND MEET OR EXCEED DIN STANDARDS. THE SONIC SCREWDRIVERS ARE DESIGNED TO OFFER A HIGH TORQUE PERFORMANCE WITHOUT SACRIFICING TOUCH OR SENSITIVITY.

5 INDIVIDUALLY SHAPED HANDLES TO PROVIDE PERFECT GRIP



SCREWDRIVER IS RESISTANT AGAINST FOLLOWING FLUIDS:

- BRAKE FLUID
- GASOLINE
- ETHYLENE GLYCOL
- MOTOR OIL
- KEROSENE
- TURPENTINE
- PETROLEUM
- ETHYL ALCOHOL
- METHYLBENZENE
- DEGREASER

CHROME VANADIUM



LIGHT WEIGHT

FEATURES:

- LIGHT WEIGHT
- UNIQUE USER COMFORT
- HIGH TORQUE
- PERFECT ERGONOMIC GRIP DESIGN
- EFFICIENT AND FAST WORKING
- COMFORTABLE BI-MATERIAL GRIP
- EXCELLENT CONSTRUCTION
- MAGNETIC HARDENED BLACK TIPS
- 5 INDIVIDUALLY SHAPED GRIPS

BI-MATERIAL USER COMFORT:
RED PART PP (POLYPROYLENE)
BLACK PART TPV (THERMOPLASTIC VULCANIZATE)



MAGNETIC HARDENED BLACK TIP



UNIQUE ERGONOMICALLY DESIGNED GRIP



EUROPEAN HANGER + EAN-CODE + ART. NO.



EXCELLENT USER FRIENDLY, HIGHLY EFFECTIVE GRIP, FOR MAXIMUM POWER



SONIC OFFERS A RANGE OF SCREWDRIVERS IN SLOTTED, PHILLIPS, POZIDRIVE, STAR, STAR TAMPERPROOF, HEX NUT AND HEX BALL. SONIC ALSO HAS EXTRA LONG SLOTTED AND PHILLIPS SCREWDRIVERS, PAGE ?????


SLOTTED
DIN NO ISO 2380




PHILLIPS
DIN NO ISO 8764




POZIDRIVE
DIN NO ISO 8764





STAR




STAR TAMPERPROOF






111... | PHILLIPS SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
1110	PHILLIPS SCREWDRIVER PH.0	PH.0	60	73	133	20	10	ISO 8764-1 + 8764-2
1111	PHILLIPS SCREWDRIVER PH.1	PH.1	80	104	184	62	10	ISO 8764-1 + 8764-2
1112	PHILLIPS SCREWDRIVER PH.2	PH.2	100	115	215	94	10	ISO 8764-1 + 8764-2
1113	PHILLIPS SCREWDRIVER PH.3	PH.3	150	125	275	156	10	ISO 8764-1 + 8764-2




111...S | PHILLIPS STUBBY SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
1111S	PHILLIPS SCREWDRIVER PH.1	PH.1	38	65	103	44	10	ISO 8764-1 + 8764-2
1112S	PHILLIPS SCREWDRIVER PH.2	PH.2	38	65	103	48	10	ISO 8764-1 + 8764-2




151... | HAMMER GO-THROUGH PHILLIPS SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
1511	HAMMER GO-THROUGH PHILLIPS SCREWDRIVER PH.1	PH.1	75	104	179	80	5	ISO 8764-1
1512	HAMMER GO-THROUGH PHILLIPS SCREWDRIVER PH.2	PH.2	100	115	215	134	5	ISO 8764-1
1513	HAMMER GO-THROUGH PHILLIPS SCREWDRIVER PH.3	PH.3	150	125	275	202	5	ISO 8764-1




161... | VDE PHILLIPS SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
1610	VDE PHILLIPS SCREWDRIVER PH.0	PH.0	60	73	133	20	5	ISO 8764 + EN 60900
1611	VDE PHILLIPS SCREWDRIVER PH.1	PH.1	80	104	184	62	5	ISO 8764 + EN 60900
1612	VDE PHILLIPS SCREWDRIVER PH.2	PH.2	100	115	215	94	5	ISO 8764 + EN 60900




112... | POZIDRIVE SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
1120	POZIDRIVE SCREWDRIVER PZ.0	PZ.0	60	73	133	22	10	ISO 8764-1 + 8764-2
1121	POZIDRIVE SCREWDRIVER PZ.1	PZ.1	80	104	184	64	10	ISO 8764-1 + 8764-2
1122	POZIDRIVE SCREWDRIVER PZ.2	PZ.2	100	115	215	96	10	ISO 8764-1 + 8764-2
1123	POZIDRIVE SCREWDRIVER PZ.3	PZ.3	150	125	275	158	5	ISO 8764-1 + 8764-2




112...S | POZIDRIVE STUBBY SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
11215	POZIDRIVE STUBBY SCREWDRIVER PZ.1	PZ.1	38	65	103	42	10	ISO 8764-1 + 8764-2
11225	POZIDRIVE STUBBY SCREWDRIVER PZ.2	PZ.2	38	65	103	48	10	ISO 8764-1 + 8764-2




113... | SLOTTED SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
11303	SLOTTED SCREWDRIVER 3	3	75	73	148	20	10	ISO 2380-1 + 2380-2
11335	SLOTTED SCREWDRIVER 3.5	3.5	100	73	173	24	10	ISO 2380-1 + 2380-2
11304	SLOTTED SCREWDRIVER 4	4	100	73	173	28	10	ISO 2380-1 + 2380-2
11355	SLOTTED SCREWDRIVER 5.5	5.5	125	104	229	72	10	ISO 2380-1 + 2380-2
11365	SLOTTED SCREWDRIVER 6.5	6.5	150	115	265	104	10	ISO 2380-1 + 2380-2
11308	SLOTTED SCREWDRIVER 8	8	175	125	300	164	10	ISO 2380-1 + 2380-2




113...S | SLOTTED STUBBY SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
113055S	SLOTTED STUBBY SCREWDRIVER 5.5	5.5	38	65	103	44	10	ISO 2380-1 + 2380-2
113065S	SLOTTED STUBBY SCREWDRIVER 6.5	6.5	38	65	103	48	10	ISO 2380-1 + 2380-2



153... | HAMMER GO-THROUGH SLOTTED SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
15355	HAMMER GO-THROUGH SLOTTED SCREWDRIVER 5.5	5.5	100	104	204	84	5	ISO 2380-1 + 2380-2
15365	HAMMER GO-THROUGH SLOTTED SCREWDRIVER 6.5	6.5	125	115	240	140	5	ISO 2380-1 + 2380-2
15308	HAMMER GO-THROUGH SLOTTED SCREWDRIVER 8	8	150	125	275	202	5	ISO 2380-1 + 2380-2



163... | VDE SLOTTED SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
16325	VDE SLOTTED SCREWDRIVER 2.5	2.5	75	73	148	20	5	ISO 2380 + EN 60900
16304	VDE SLOTTED SCREWDRIVER 4	4	100	104	204	62	5	ISO 2380 + EN 60900
16355	VDE SLOTTED SCREWDRIVER 5.5	5.5	125	104	229	78	5	ISO 2380 + EN 60900
16365	VDE SLOTTED SCREWDRIVER 6.5	6.5	150	115	265	116	5	ISO 2380 + EN 60900



47016 | MULTIFUNCTIONAL AC/DC VOLTAGE TESTER

ART. NO.	DESCRIPTION	L (MM)	G	PCS/BAG
47016	MULTIFUNCTIONAL AC/DC VOLTAGE TESTER	133	20	5



11... | SCREWDRIVER LONG

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
1114502	PHILIPS SCREWDRIVER PH.2	PH.2	450	109	559	200	5	ISO 8764-1 + 8764-2
11345065	SLOTTED SCREWDRIVER 6.5	6.5	450	109	559	198	5	ISO 2380-1 + 2380-2
11360008	SLOTTED SCREWDRIVER 8	8	600	119	719	360	5	ISO 2380-1 + 2380-2





116... | STAR SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG
11605	STAR SCREWDRIVER T5	T5	75	73	148	24	10
11606	STAR SCREWDRIVER T6	T6	75	73	148	24	10
11607	STAR SCREWDRIVER T7	T7	75	73	148	24	10
11608	STAR SCREWDRIVER T8	T8	75	73	148	24	10
11609	STAR SCREWDRIVER T9	T9	75	73	148	26	10
11610	STAR SCREWDRIVER T10	T10	100	104	204	68	10
11615	STAR SCREWDRIVER T15	T15	100	104	204	66	10
11620	STAR SCREWDRIVER T20	T20	100	104	204	68	10
11625	STAR SCREWDRIVER T25	T25	100	115	215	94	10
11627	STAR SCREWDRIVER T27	T27	100	115	215	92	10
11630	STAR SCREWDRIVER T30	T30	100	115	215	94	10
11640	STAR SCREWDRIVER T40	T40	100	115	215	102	10
11645	STAR SCREWDRIVER T45	T45	100	115	215	136	10




117... | STAR TAMPER SCREWDRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG
11708	STAR TAMPER SCREWDRIVER T8	T8	75	73	148	24	10
11710	STAR TAMPER SCREWDRIVER T10	T10	100	104	204	64	10
11715	STAR TAMPER SCREWDRIVER T15	T15	100	104	204	66	10
11720	STAR TAMPER SCREWDRIVER T20	T20	100	104	204	68	10
11725	STAR TAMPER SCREWDRIVER T25	T25	100	115	215	94	10
11727	STAR TAMPER SCREWDRIVER T27	T27	100	115	215	92	10
11730	STAR TAMPER SCREWDRIVER T30	T30	100	115	215	94	10
11740	STAR TAMPER SCREWDRIVER T40	T40	100	115	215	102	10




125... | HEX NUT DRIVER

ART. NO.	DESCRIPTION	SIZE	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG
12525004	HEX NUT DRIVER 4	4	125	110	235	102	10
12525005	HEX NUT DRIVER 5	5	125	110	235	106	10
125250055	HEX NUT DRIVER 5.5	5.5	125	110	235	108	10
12525006	HEX NUT DRIVER 6	6	125	110	235	110	10
12525008	HEX NUT DRIVER 8	8	125	110	235	118	10
12525009	HEX NUT DRIVER 9	9	125	110	235	118	10
12525010	HEX NUT DRIVER 10	10	125	110	235	122	10
12525011	HEX NUT DRIVER 11	11	125	122	247	162	10
12525012	HEX NUT DRIVER 12	12	125	122	247	166	10
12525013	HEX NUT DRIVER 13	13	125	122	247	168	10




475... | FLEXIBLE HEX NUT DRIVER

ART. NO.	DESCRIPTION	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG
47506	FLEXIBLE HEX NUT DRIVER 6	148	122	270	146	10
47507	FLEXIBLE HEX NUT DRIVER 7	148	122	270	146	10
47508	FLEXIBLE HEX NUT DRIVER 8	148	122	270	146	10

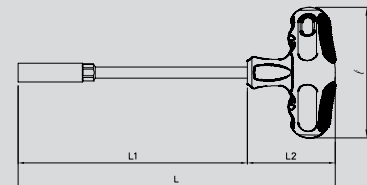


145... | HEX NUT DRIVER T HANDLE

ART. NO.	DESCRIPTION	SIZE	l(MM)	L1(MM)	L2(MM)	L(MM)	G	PCS/BAG	DIN NO.
14523005	HEX NUT DRIVER T HANDLE 5	5	95	230	57	287	112	5	3125
14523006	HEX NUT DRIVER T HANDLE 6	6	95	230	57	287	134	5	3125
14523007	HEX NUT DRIVER T HANDLE 7	7	95	230	57	287	150	5	3125
14523008	HEX NUT DRIVER T HANDLE 8	8	95	230	57	287	148	5	3125
14523009	HEX NUT DRIVER T HANDLE 9	9	95	230	57	287	152	5	3125
14523010	HEX NUT DRIVER T HANDLE 10	10	95	230	57	287	158	5	3125
14523011	HEX NUT DRIVER T HANDLE 11	11	95	230	57	287	190	5	3125
14523012	HEX NUT DRIVER T HANDLE 12	12	95	230	57	287	196	5	3125
14523013	HEX NUT DRIVER T HANDLE 13	13	95	230	57	287	198	5	3125



195... | HEX BALL POINT GRIP KEY

ART. NO.	DESCRIPTION	SIZE	I1(MM)	I(MM)	L1(MM)	L(MM)	G	PCS/BAG	DIN NO.
1950102	HEX BALL POINT GRIP KEY 2	2	15	71	110	140	20	10	ISO 2936
19501025	HEX BALL POINT GRIP KEY 2.5	2.5	15	71	110	140	22	10	ISO 2936
1950103	HEX BALL POINT GRIP KEY 3	3	15	71	110	140	26	10	ISO 2936
1950104	HEX BALL POINT GRIP KEY 4	4	15	71	110	140	38	10	ISO 2936
1950105	HEX BALL POINT GRIP KEY 5	5	18	94	160	204	86	10	ISO 2936
1950106	HEX BALL POINT GRIP KEY 6	6	18	94	160	204	106	10	ISO 2936
1950107	HEX BALL POINT GRIP KEY 7	7	18	94	160	204	126	10	ISO 2936
1950108	HEX BALL POINT GRIP KEY 8	8	18	94	200	245	186	10	ISO 2936
1950110	HEX BALL POINT GRIP KEY 10	10	21	122	215	270	342	10	ISO 2936
1950112	HEX BALL POINT GRIP KEY 12	12	21	122	215	270	440	10	ISO 2936



196... | STAR GRIP KEY

ART. NO.	DESCRIPTION	SIZE	I1(MM)	I(MM)	L1(MM)	L(MM)	G	PCS/BAG
1960108	STAR GRIP KEY T8	T8	15	71	110	140	28	10
1960110	STAR GRIP KEY T10	T10	15	71	110	140	30	10
1960115	STAR GRIP KEY T15	T15	15	71	110	140	30	10
1960120	STAR GRIP KEY T20	T20	15	71	110	140	30	10
1960125	STAR GRIP KEY T25	T25	18	94	160	204	86	10
1960127	STAR GRIP KEY T27	T27	18	94	160	204	86	10
1960130	STAR GRIP KEY T30	T30	18	94	160	204	86	10
1960140	STAR GRIP KEY T40	T40	18	94	185	231	114	10
1960145	STAR GRIP KEY T45	T45	21	122	215	270	190	10
1960150	STAR GRIP KEY T50	T50	21	122	215	270	240	10